


无刷电机

RB-2838-68

用途：
风扇、电动窗帘、智能电器、真空泵、手持电动螺丝刀、气泵、水泵、
电动阀、手术动力设备、搅拌机、离心机、医用微型泵、血压计、
电动刮胡刀、按摩仪、吹风机

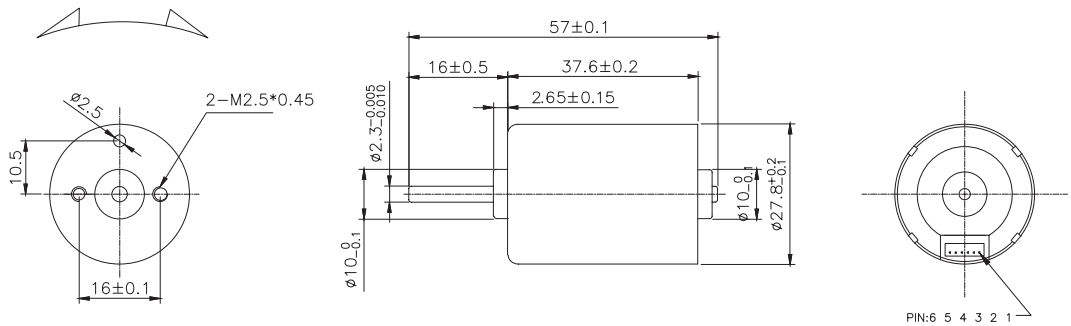

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-2838-68-N-01	3.5V-4.2V	3.7V CONSTANT	7800	0.29	6788	1.95	76	7.45	5.3	73	585	57.35
RB-2838-68-N-02	9.0V-14.0V	12.0V CONSTANT	3570	0.04	2911	0.18	50.7	4.97	1.5	71.3	274.6	26.92
RB-2838-68-N-03	19V-26.0V	24.0V CONSTANT	6370	0.1	4845	0.31	103.7	10.17	5.1	67.6	433.3	42.48
RB-2838-68-N-04	6.0V-12.0V	7.2V CONSTANT	5000	0.18	4500	0.85	100.062	9.81	4.63	72	576.3	56.5

马达出轴长度与性能参数，以及 EMC 对策可依客户需求调整，详情请洽业务。

