


无刷电机

RB-4160-68

用途：
料理机、高速离心机、医用微型泵、手术动力设备、驻车加热器、
水泵、风机、致动器、空气压缩机、电动工具、投影机、自动贩卖机、
办公打印设备

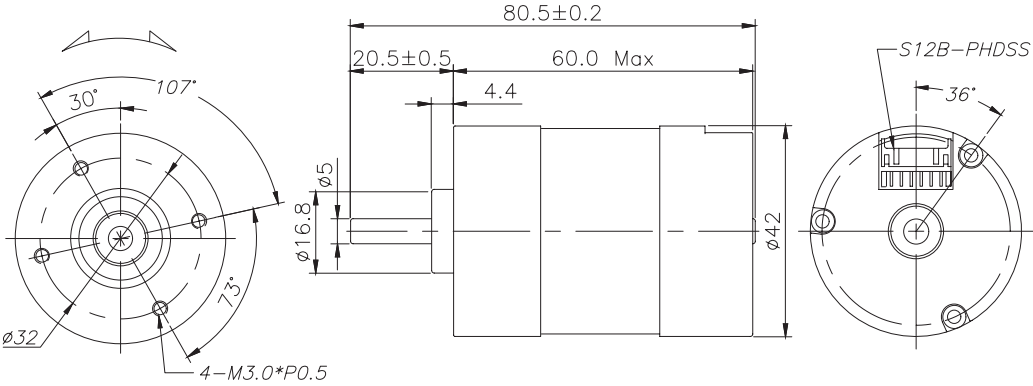

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-4160-68-N-01	12.0V-26.0V	24.0V CONSTANT	3998	0.23	3406	1.32	748	73.33	26.17	82.3	5052.8	495.37
RB-4160-68-N-02	12.0V-26.0V	24.0V CONSTANT	4150	0.22	3587	1.6	827	81.08	30.5	79.28	6102.9	598.32
RB-4160-68-N-03	12.0V-26.0V	12.0V CONSTANT	4000	0.42	3240	2.9	800	78.43	22.07	77.31	412.91	40.48
RB-4160-68-N-04	12.0V-26.0V	24.0V CONSTANT	5800	0.34	5100	1.4	500	49	33.48	79.21	406.28	39.83

马达出轴长度与性能参数，以及 EMC 对策可依客户需求调整，详情请洽业务。

